

AD-A013 766

ADDENDUM TO: BAND MODEL FORMULATION FOR INHOMOGENEOUS
OPTICAL PATHS

Stephen J. Young

Aerospace Corporation

Prepared for:

Space and Missile Systems Organization
Defense Advanced Research Projects Agency

31 July 1975

DISTRIBUTED BY:

NTIS

National Technical Information Service
U. S. DEPARTMENT OF COMMERCE

240107

AD A013766

Addendum to: Band Model Formulation for Inhomogeneous Optical Paths

S. J. YOUNG
Chemistry and Physics Laboratory
Laboratory Operations
The Aerospace Corporation
El Segundo, Calif. 90245

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
US Department of Commerce
Springfield, VA. 22151

31 July 1975


Interim Report

APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION UNLIMITED

Sponsored by
DEFENSE ADVANCED RESEARCH PROJECTS AGENCY
1400 Wilson Blvd
Arlington, Va. 22209

DARPA Order No. 2843

SPACE AND MISSILE SYSTEMS ORGANIZATION
AIR FORCE SYSTEMS COMMAND
Los Angeles Air Force Station
Los Angeles, Calif 90045

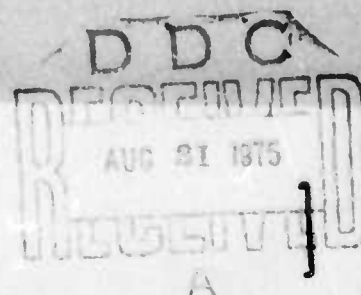

THE VIEWS AND CONCLUSIONS CONTAINED IN THIS DOCUMENT ARE THOSE
OF THE AUTHORS AND SHOULD NOT BE INTERPRETED AS NECESSARILY
REPRESENTING THE OFFICIAL POLICIES, EITHER EXPRESSED OR IMPLIED, OF
THE DEFENSE ADVANCED RESEARCH PROJECTS AGENCY OR THE U.S.
GOVERNMENT.

F04701-75-C-0076.

Seymour Siegel
S. Siegel, Director
Chemistry and Physics Laboratory

[illegible]

Ronald C. Lawson
Ronald C. Lawson, 2nd Lt.
United States Air Force
Technology Development Division
Deputy for Technology

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER SAMSO-TR-75-210	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ADDENDUM TO: BAND MODEL FORMULATION FOR INHOMOGENEOUS OPTICAL PATHS		5. TYPE OF REPORT & PERIOD COVERED Interim
		6. PERFORMING ORG. REPORT NUMBER TR-0076(6970)-3
7. AUTHOR(s) Stephen J. Young		8. CONTRACT OR GRANT NUMBER(s) F04701-75-C-0076
9. PERFORMING ORGANIZATION NAME AND ADDRESS The Aerospace Corporation El Segundo, Calif. 90245		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Defense Advanced Research Projects Agency 1400 Wilson Blvd. Arlington, Va. 22209		12. REPORT DATE 31 July 1975
		13. NUMBER OF PAGES 12
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Space and Missile Systems Organization Air Force Systems Command Los Angeles, Calif. 90045		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Defense Advanced Research Projects Agency or the U.S. government.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Band Model Formulation Inhomogeneous Optical Paths		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The statistical band model formulation for highly inhomogeneous optical paths presented in a previous paper is extended to the case where the strengths of lines in Δv are distributed according to a modified inverse probability function.		

CONTENTS

ADDENDUM TO: BAND MODEL FORMULATION FOR INHOMOGENEOUS OPTICAL PATHS	3
REFERENCES	11

TABLE

1. Equivalent Width Derivative Function for an Exponential- Tailed Inverse Intensity Distribution of Doppler Lines in the Lindquist-Simmons Approximation	8
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---

FIGURES

1. Equivalent Width Derivative Function for an Exponential-Tailed Inverse Intensity Distribution of Lorentz Lines: (a) Curtis-Godson Approximation; (b) Lindquist-Simmons Approximation	6
2. Equivalent Width Derivative Function for an Exponential-Tailed Inverse Intensity Distribution of Doppler Lines: (a) Curtis-Godson Approxima- tion; (b) Lindquist-Simmons Approximation	10

In a previous paper,⁽¹⁾ the mean equivalent width derivative functions $y(x, \rho)$ for bands of randomly arranged Lorentz or Doppler lines with a constant or exponential distribution of line strengths were derived and tabulated. Here, an extension to the exponential-tailed inverse line strength distribution of Malkmus⁽²⁾ is made. Familiarity on the reader's part with the contents of Ref. 1 is assumed.

The exponential-tailed inverse distribution is an approximation to the purely inverse distribution but is more mathematically convenient to use than the latter, at least when employed in conjunction with the Lorentz line shape. According to this distribution, the probability that a line in $\Delta\nu$ has strength S ($0 \leq S \leq \infty$) in dS is

$$P(S)dS = \frac{1}{S \ln R} \left[\exp \left(-\frac{S}{S_M} \right) - \exp \left(-\frac{RS}{S_M} \right) \right] dS \quad (1)$$

where S_M is the maximum line strength cut-off and S_M/R the minimum cut-off that would apply to the purely inverse distribution. The mean line strength for the distribution is

$$\bar{S} = \frac{R-1}{R \ln R} S_M. \quad (2)$$

The approximation to the inverse distribution results as $R \rightarrow \infty$. In application, $P(S)$ in the form of Eq. (1) is used to compute the desired result in terms of R , and then the limit $R \rightarrow \infty$ is taken. In most cases, the functional form of the result is independent of R .

Preceding page blank

The equivalent width for an array of Lorentz lines with this strength distribution has the simple form⁽²⁾

$$\frac{\overline{W}_L}{\delta} = \beta_L f(x) \quad (3)$$

where

$$f(x) = \sqrt{1 + 2x} - 1. \quad (4)$$

For an array of Doppler lines, the result is

$$\frac{\overline{W}_D}{\delta} = \beta_D H(x) \quad (5)$$

where

$$H(x) = \frac{2}{\sqrt{\pi}} \int_0^{\infty} \ln [1 + x \exp(-z^2)] dz. \quad (6)$$

The curve of growth function $H(x)$ has been considered by Malkmus,⁽³⁾ who has given a series solution for small x and an asymptotic expansion for large x .

The equivalent width derivative function $y(x, \rho)$ for an array of Lorentz lines and in the Lindquist-Simmons approximation is obtained by using $P(S)$ of Eq. (1) with Eqs. (14) and (18) of Ref. 1. The result is

$$y(x, \rho) = \frac{2\rho}{\pi} \int_0^{\pi} \frac{d\theta}{[(\rho^2 + 1) + (\rho^2 - 1) \cos \theta] [1 + ax(1 + \cos \theta)] [1 + bx(1 + \cos \theta)]} \quad (7)$$

where $a = R/(\sqrt{R} + 1)^2$ and $b = a/R$. The limit $R \rightarrow \infty$ yields

$$y(x, \rho) = \frac{2\rho}{\pi} \int_0^\pi \frac{d\theta}{[(\rho^2 + 1) + (\rho^2 - 1)\cos\theta][1 + x(1 + \cos\theta)]}. \quad (8)$$


This result is very similar in form to that obtained in Ref. 1 for the exponential distribution. The only difference is that the exponent on the function $1 + x(1 + \cos\theta)$ in the denominator has been reduced from 2 to 1 and is clearly a result of the S^{-1} factor in the distribution function. This reduction in power is significant since now, when the transformation to the complex z plane by $z = e^{i\theta}$ is made in order to perform the integration of Eq. (8) by the method of residues, the order of the poles at z_3 and z_4 [Eqs. (27c) and (27d) of Ref. 1] is also reduced from 2 to 1. A straightforward evaluation of the residues yields the relatively simple expression

$$y(x, \rho) = \frac{2\rho(1+x) + (1+\rho^2)\sqrt{1+2x}}{\sqrt{1+2x}[\rho + \sqrt{1+2x}]^2}. \quad (9)$$


For a homogeneous path ($\rho = 1$), Eq. (9) reduces to $y(x, 1) = (1+2x)^{-1/2}$, which is $df(x)/dx$ as required. Curves of $y(x, \rho)$ vs x for several values of ρ according to Eq. (9) and according to the Curtis-Godson expression

$$y(x, \rho) = (2 - \rho) \frac{df(x)}{dx} + (\rho - 1) \frac{f(x)}{x} \quad (10)$$

are shown in Fig. 1. The discussion of these curves is similar to that given for the constant and exponential distribution curves in Ref. 1. The simplicity in form of the result of Eq. (9) over the results for the constant

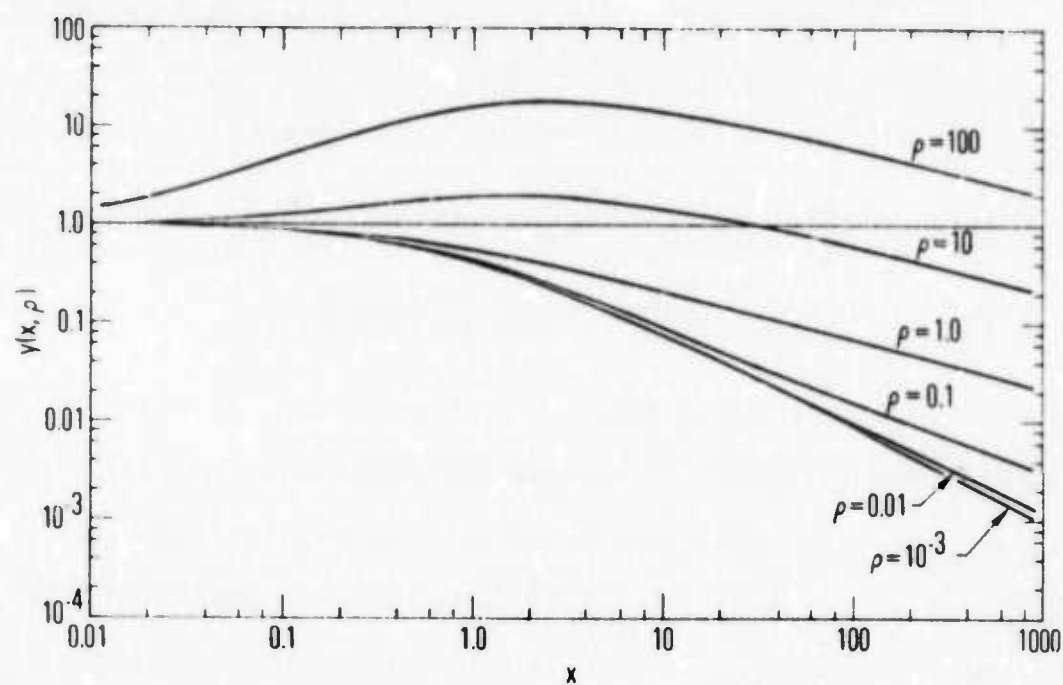

(a)

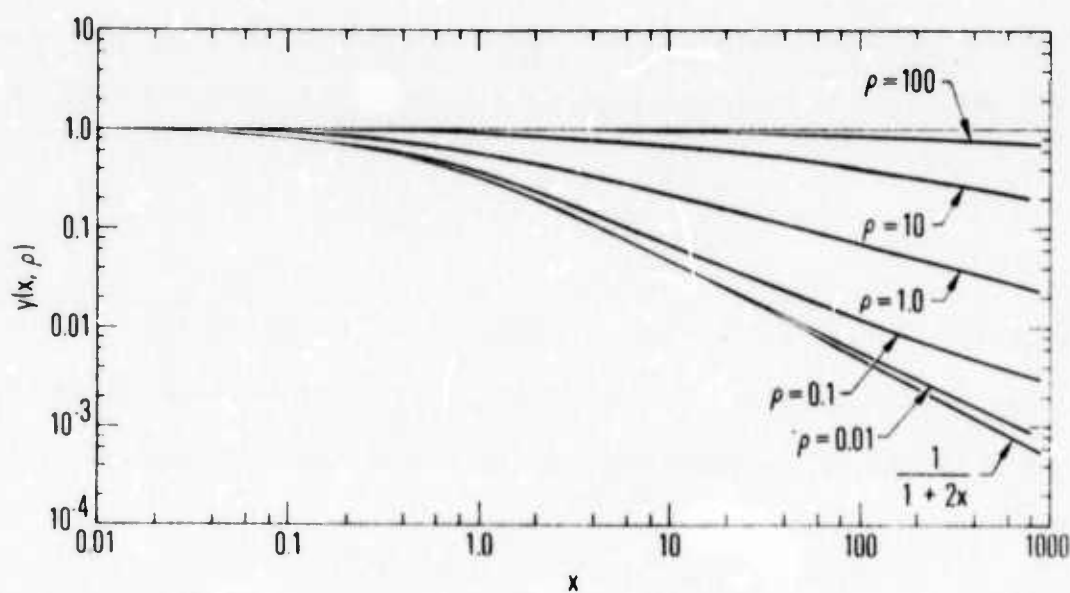

(b)

Fig. 1. Equivalent Width Derivative Function for an Exponential-Tailed Inverse Intensity Distribution of Lorentz Lines:
(a) Curtis-Godson Approximation; (b) Lindquist-Simmons Approximation

and exponential cases is enhanced by the fact that an inverse distribution is a more realistic representation for many molecular species than either of the other two.

When Eqs. (16) and (18) of Ref. 1 are used along with $P(S)$ of Eq. 1, the derivative function for an array of Doppler lines in the Lindquist-Simmons approximation is found to be (after $R \rightarrow \infty$)

$$y(x, \rho) = \frac{2}{\sqrt{\pi}} \int_0^{\infty} \frac{e^{-z^2}}{[1 + x \exp(-\rho^2 z^2)]} dz. \quad (11)$$

Again, this result is similar to that obtained for an exponential distribution of Doppler lines in Ref. 1. The only change is a reduction in the power of the denominator from 2 to 1. Note that $y(x, 1) = dH(x)/dx$ as required for a homogeneous path. A series representation for $x < 1$ is

$$y(x, \rho) = \sum_{n=0}^{\infty} \frac{(-x)^n}{\sqrt{1 + n\rho^2}}, \quad (12)$$

and a useful approximation ($\lesssim 0.8\%$) for $\rho \lesssim 0.5$ is

$$y(x, \rho) = \frac{1}{\sqrt{1 + x} [1 - x(\rho^2 - 1)]^{1/2}}. \quad (13)$$

The most useful representation of $y(x, \rho)$ is a table of values for a wide range of x and ρ . The entries of Table 1 were computed by a numerical integration of Eq. (11) in a manner similar to that of Ref. 1 except that

Table 1
Equivalent Width Derivative Function for an Exponential-Tailed Inverse
Intensity Distribution of Doppler Lines in the Lindquist-Simmons Approximation



x	ρ						
	5.00E-1	1.00E+0	1.25E+0	1.50E+0	2.00E+0	3.00E+0	5.00E+0
1.0E-2	0.99114E+0	0.99299E+0	0.99380E+0	0.99450E+0	0.99556E-0	0.99686E-0	0.99805E-0
2.0E-2	0.98243E+0	0.98608E+0	0.98770E+0	0.98907E+0	0.99119E-0	0.99377E-0	0.99613E-0
5.0E-2	0.95723E+0	0.96603E+0	0.96995E+0	0.97329E+0	0.97844E-0	0.98474E-0	0.99053E-0
1.0E-1	0.91803E+0	0.93460E+0	0.94207E+0	0.94846E+0	0.95836E-0	0.97050E-0	0.98168E-0
2.0E-1	0.84868E+0	0.87828E+0	0.89190E+0	0.90367E+0	0.92200E-0	0.94464E-0	0.96560E-0
5.0E-1	0.69248E+0	0.74750E+0	0.77433E+0	0.79799E+0	0.83553E-0	0.88273E-0	0.92692E-0
1.0E+0	0.53069E+0	0.60490E+0	0.64392E+0	0.67937E+0	0.73706E-0	0.81132E-0	0.88198E-0
2.0E+0	0.36239E+0	0.44564E+0	0.49455E+0	0.54100E+0	0.61957E-0	0.72444E-0	0.82669E-0
5.0E+0	0.18622E+0	0.25945E+0	0.31182E+0	0.36593E+0	0.46452E-0	0.60548E-0	0.74932E-0
1.0E+1	0.10301E+0	0.15883E+0	0.20643E+0	0.25986E+0	0.36450E-0	0.52442E-0	0.69490E-0
2.0E+1	0.54426E-1	0.92598E-1	0.13195E+0	0.18053E+0	0.28411E-0	0.45506E-0	0.64664E-0
5.0E+1	0.22544E-1	0.43173E-1	0.70728E-1	0.10995E+0	0.20490E-0	0.38046E-0	0.59211E-0
1.0E+2	0.11408E-1	0.23642E-1	0.43542E-1	0.75384E-1	0.16102E-0	0.33469E-0	0.55672E-0
2.0E+2	0.57384E-2	0.12759E-1	0.26649E-1	0.51787E-1	0.12735E-0	0.29611E-0	0.52535E-0
5.0E+2	0.23038E-2	0.55566E-2	0.13871E-1	0.31709E-1	0.94277E-1	0.25368E-0	0.48873E-0
1.0E+3	0.11533E-2	0.29368E-2	0.84594E-2	0.21992E-1	0.75569E-1	0.22668E-0	0.46396E-0
2.0E+3	0.57700E-3	0.15432E-2	0.51628E-2	0.15322E-1	0.60853E-1	0.20319E-0	0.44126E-0
5.0E+3	0.23088E-3	0.65458E-3	0.26937E-2	0.95640E-2	0.45971E-1	0.17650E-0	0.41390E-0
1.0E+4	0.11546E-3	0.34067E-3	0.16503E-2	0.67263E-2	0.37322E-1	0.15906E-0	0.39491E-0
2.0E+4	0.57731E-4	0.17676E-3	0.10132E-2	0.47468E-2	0.30380E-1	0.14358E-0	0.37718E-0
5.0E+4	0.23093E-4	0.73960E-4	0.53344E-3	0.30083E-2	0.23224E-1	0.12570E-0	0.35546E-0
1.0E+5	0.11547E-4	0.38163E-4	0.32916E-3	0.21370E-2	0.18996E-1	0.11383E-0	0.34018E-0

a Gaussian quadrature formula was used in place of the Wedle formula. The values are accurate to 1 part in 10^5 . Curves of $y(x, \rho)$ according to the Lindquist-Simmons result [Eq. (11)] and the Curtis-Godson expression

$$y(x, \rho) = (2 - \rho) \frac{dH(x)}{dx} + (\rho - 1) \frac{H(x)}{x} \quad (14)$$

are displayed in Fig. 2.

For both the Lorentz and Doppler cases, the transition from the small x to the large x behavior of $y(x, \rho)$ is more gradual for the modified inverse distribution than for the exponential distribution (compare Fig. 1 of this paper with Fig. 2 of Ref. 1 for the Lorentz case and Fig. 2 of this paper with Fig. 4 of Ref. 1 for the Doppler case). This effect is due to the greater weight placed on weak lines by the inverse distribution than by the exponential distribution.

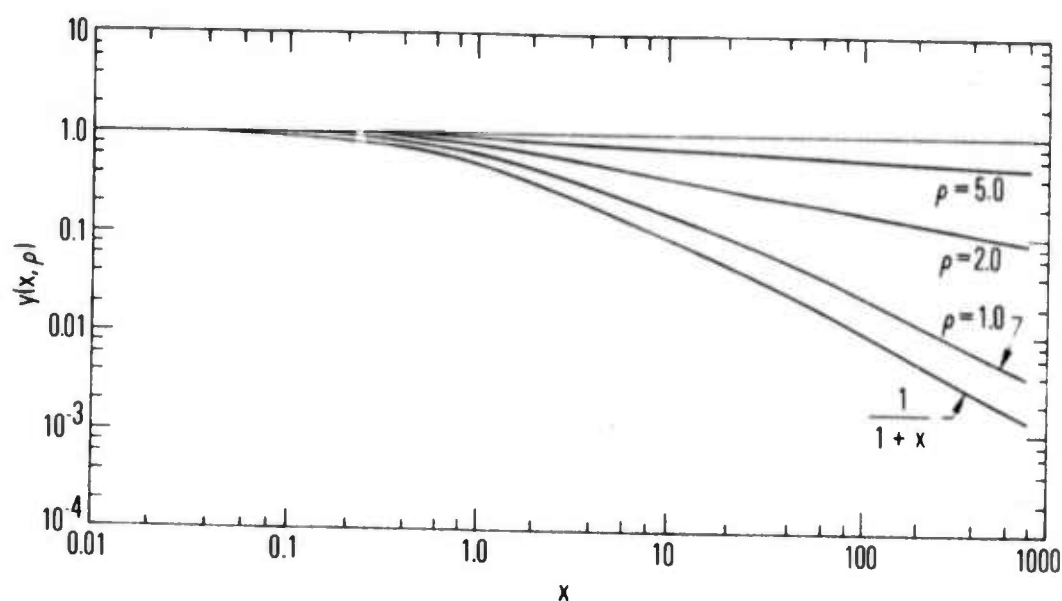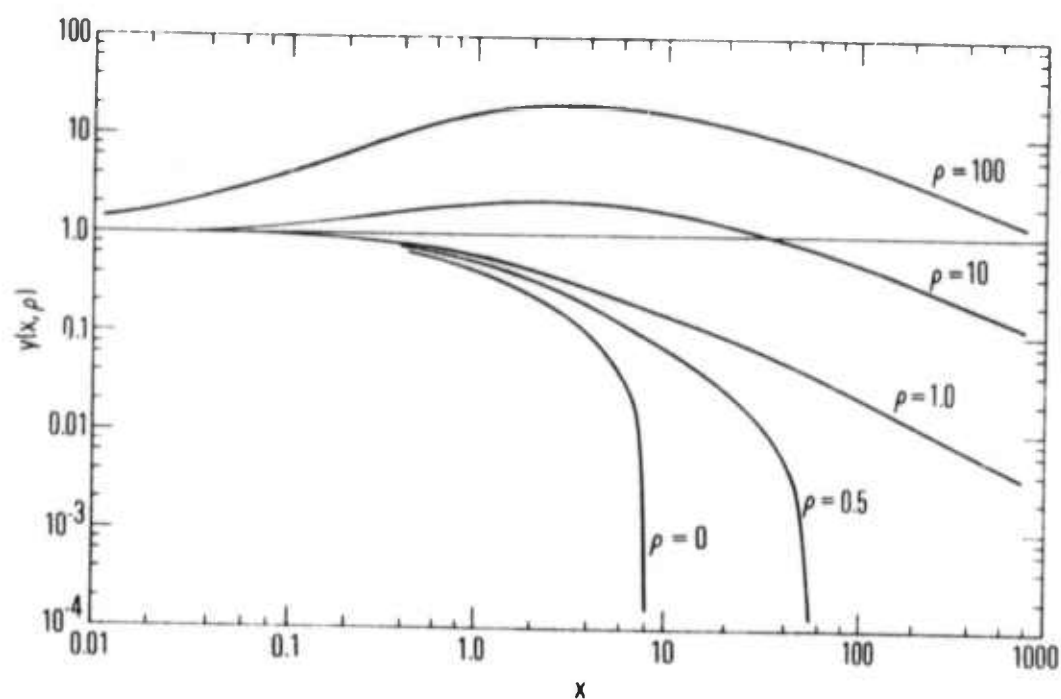

(b)

Fig. 2. Equivalent Width Derivative Function for an Exponential-Tailed Inverse Intensity Distribution of Doppler Lines: (a) Curtis-Godson Approximation; (b) Lindquist-Simmons Approximation

REFERENCES

1. S. J. Young, JQSRT 15, 483 (1975).
2. W. Malkmus, J. Opt. Soc. Amer. 57, 323 (1967).
3. W. Malkmus, J. Opt. Soc. Amer. 58, 1214 (1968).

LABORATORY OPERATIONS

The Laboratory Operations of The Aerospace Corporation is conducting experimental and theoretical investigations necessary for the evaluation and application of scientific advances to new military concepts and systems. Versatility and flexibility have been developed to a high degree by the laboratory personnel in dealing with the many problems encountered in the nation's rapidly developing space and missile systems. Expertise in the latest scientific developments is vital to the accomplishment of tasks related to these problems. The laboratories that contribute to this research are:

Aerophysics Laboratory: Launch and reentry aerodynamics, heat transfer, reentry physics, chemical kinetics, structural mechanics, flight dynamics, atmospheric pollution, and high-power gas lasers.

Chemistry and Physics Laboratory: Atmospheric reactions and atmospheric optics, chemical reactions in polluted atmospheres, chemical reactions of excited species in rocket plumes, chemical thermodynamics, plasma and laser-induced reactions, laser chemistry, propulsion chemistry, space vacuum and radiation effects on materials, lubrication and surface phenomena, photosensitive materials and sensors, high precision laser ranging, and the application of physics and chemistry to problems of law enforcement and biomedicine.

Electronics Research Laboratory: Electromagnetic theory, devices, and propagation phenomena, including plasma electromagnetics; quantum electronics, lasers, and electro-optics; communication sciences, applied electronics, semiconducting, superconducting, and crystal device physics, optical and acoustical imaging; atmospheric pollution; millimeter wave and far-infrared technology.

Materials Sciences Laboratory: Development of new materials; metal matrix composites and new forms of carbon; test and evaluation of graphite and ceramics in reentry; spacecraft materials and electronic components in nuclear weapons environment; application of fracture mechanics to stress corrosion and fatigue-induced fractures in structural metals.

Space Physics Laboratory: Atmospheric and ionospheric physics, radiation from the atmosphere, density and composition of the atmosphere, aurorae and airglow; magnetospheric physics, cosmic rays, generation and propagation of plasma waves in the magnetosphere; solar physics, studies of solar magnetic fields; space astronomy, x-ray astronomy; the effects of nuclear explosions, magnetic storms, and solar activity on the earth's atmosphere, ionosphere, and magnetosphere; the effects of optical, electromagnetic, and particulate radiations in space on space systems.

THE AEROSPACE CORPORATION
El Segundo, California